

# nifty

# 120

**TRAILER MOUNTED  
ACCESS PLATFORM**



**12.33m (40ft 5in)**  
Working height

**5m (16ft 8in)**  
Working outreach

**Fully Proportional  
Hydraulic Controls**

Simple, reliable &  
easy to maintain

**Bi-Energy Available**

Optimising utilisation

**Weight Saving Design**

Easily towed &  
manoeuvred on site

**Hydraulic Outriggers  
Available**

For quick & easy setup

**Telescopic Axles**

Access through double  
doorway openings



**niftylift.com**




# nifty 120

The **Nifty 120** is one of the most robust and versatile trailer mounts available. Its telescopic axles allow it to pass through double doorway openings and setting up is simple with a choice of manual or hydraulic outriggers. Operation is quick and easy and its reliable hydraulic controls make it an ideal alternative to ladders and scaffolds.


## SAFETY FEATURES

- Pressure sensitive outriggers
- Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- CE Marked

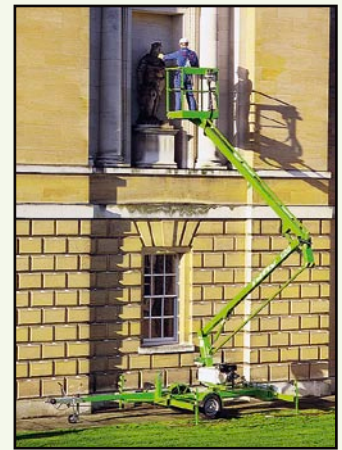

Retractable axles allow the **120** to pass through a 1.10m (3ft 6in) wide opening.

The **120's** manual outriggers are both cost effective and simple to set up.

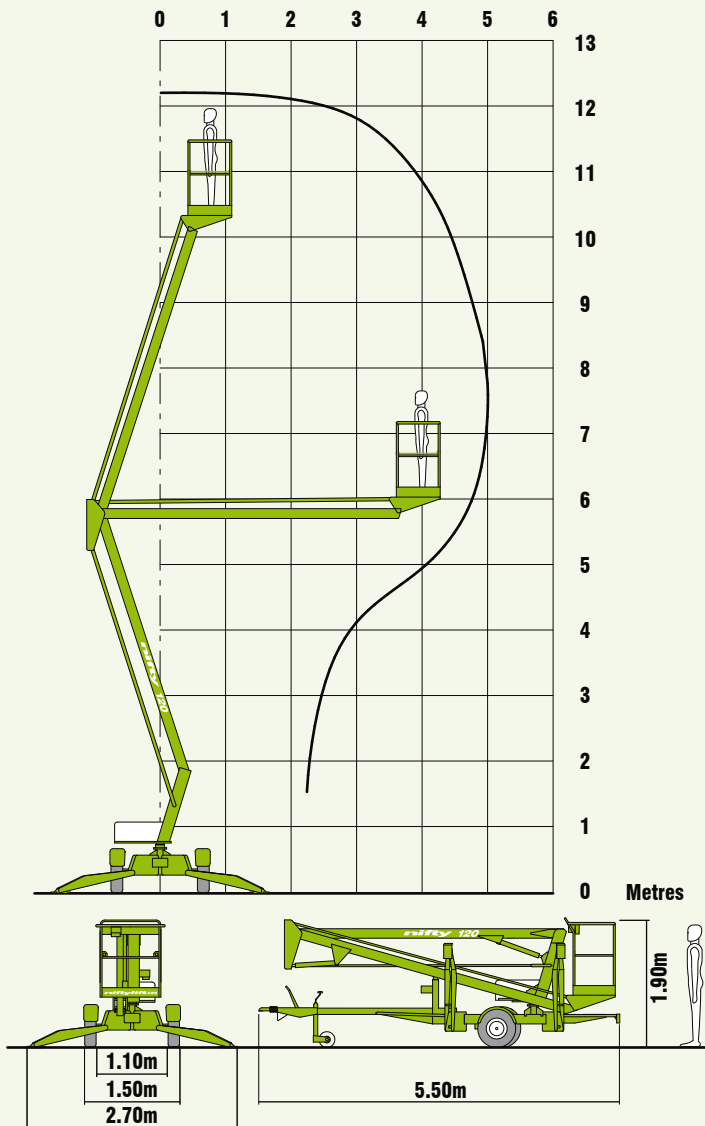

To save time and energy when setting up, the **120** is also available with a hydraulic outriggers option.



## SPECIFICATIONS

<b>Working Height</b>	12.33m	40ft 5in
<b>Platform Height</b>	10.33m	33ft 10in
<b>Working Outreach</b>	5m	16ft 8in
<b>Slew</b>	360°	
<b>Width - Travelling</b>	1.50m	4ft 11in
<b>- Working</b>	2.70m	8ft 11in
<b>- Axles Retracted*</b>	1.10m	3ft 8in
<b>Height</b>	1.90m	6ft 3in
<b>Length</b>	5.50m	18ft
<b>Weight</b>	1,160kg**	2,252lbs*
<b>Platform Capacity</b>	200kg	440lbs
<b>Platform Size</b>	1.10m x 0.65m	3ft 8in x 2ft 1in
<b>Control System</b>	Fully Proportional Hydraulic	
<b>Power System</b>	Mains Only Battery Only Petrol or Diesel Only Bi-Energy (Engine & Battery)	
<b>Drive Options</b>	Traction Drive	

\* Traction drive axles do not retract.

\*\* Weights may vary according to specification / power options, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

**NIFTYLIFT LTD**  
Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England

[www.niftylift.com](http://www.niftylift.com)

e-mail: [info@niftylift.com](mailto:info@niftylift.com)  
Tel.: +44 (0) 1908 223456  
Fax.: +44 (0) 1908 312733

